



0402 NPO CERAMIC CAPACITORS FOR RF & MICROWAVE

- Low ESR, High Q
- Superior Mechanical Strength
- Q = 10,000 at 1 MHz
- For Use Up to Ku-Band
- 100% Made in U.S.A.
- Suitable for Military and Space


PRESIDIO PART NUMBER	CAP. (pF)	TOL.	WVDC
0402NPO0R5_4N1N-	0.05	3,4,5,A	100, 200
0402NPO0R1_4N1N-	0.1	3,4,5,A,B	100, 200
0402NPO0R2_4N1N-	0.2	3,4,5,A,B	100, 200
0402NPO0R3_4N1N-	0.3	3,4,5,A,B,C	100, 200
0402NPO0R4_4N1N-	0.4	3,4,5,A,B,C	100, 200
0402NPO0R5_4N1N-	0.5	3,4,5,A,B,C	100, 200
0402NPO0R6_4N1N-	0.6	3,4,5,A,B,C	100, 200
0402NPO0R7_4N1N-	0.7	3,4,5,A,B,C	100, 200
0402NPO0R8_4N1N-	0.8	3,4,5,A,B,C	100, 200
0402NPO0R9_4N1N-	0.9	3,4,5,A,B,C	100, 200
0402NPO1R0_4N1N-	1.0	3,4,5,A,B,C,D	100, 200
0402NPO1R1_4N1N-	1.1	3,4,5,A,B,C,D	100, 200
0402NPO1R2_4N1N-	1.2	3,4,5,A,B,C,D	100, 200
0402NPO1R3_4N1N-	1.3	3,4,5,A,B,C,D	100, 200
0402NPO1R5_4N1N-	1.5	3,4,5,A,B,C,D	100, 200

PRESIDIO PART NUMBER	CAP. (pF)	TOL.	WVDC
0402NPO1R6_4N1N-	1.6	3,4,5,A,B,C,D	100, 200
0402NPO1R8_4N1N-	1.8	3,4,5,A,B,C,D	100, 200
0402NPO2R0_4N1N-	2.0	3,4,5,A,B,C,D	100, 200
0402NPO2R2_4N1N-	2.2	5,A,B,C,D	100, 200
0402NPO2R4_4N1N-	2.4	5,A,B,C,D	100, 200
0402NPO2R7_4N1N-	2.7	5,A,B,C,D	100, 200
0402NPO3R0_4N1N-	3.0	5,A,B,C,D	100, 200
0402NPO3R3_4N1N-	3.3	A,B,C,D	100, 200
0402NPO3R6_4N1N-	3.6	A,B,C,D	100, 200
0402NPO3R9_4N1N-	3.9	A,B,C,D	100, 200
0402NPO4R3_4N1N-	4.3	A,B,C,D	100, 200
0402NPO4R7_4N1N-	4.7	A,B,C,D	100, 200
0402NPO5R1_4N1N-	5.1	A,B,C,D	100, 200
0402NPO5R6_4N1N-	5.6	A,B,C,D	100, 200
0402NPO6R2_4N1N-	6.2	A,B,C,D	100, 200

PRESIDIO PART NUMBER	CAP. (pF)	TOL.	WVDC
0402NPO6R8_4N1N-	6.8	A,B,C,D	100, 200
0402NPO7R5_4N1N-	7.5	A,B,C,D	100, 200
0402NPO8R2_4N1N-	8.2	A,B,C,D	100, 200
0402NPO9R1_4N1N-	9.1	A,B,C,D	100, 200
0402NPO100_4N1N-	10	F,G,J	100, 200
0402NPO110_4N1N-	11	F,G,J	100, 200
0402NPO120_4N1N-	12	F,G,J	100, 200
0402NPO130_4N1N-	13	F,G,J	100, 200
0402NPO150_4N1N-	15	F,G,J	100, 200
0402NPO160_4N1N-	16	F,G,J	100, 200
0402NPO180_4N1N-	18	F,G,J	100, 200
0402NPO200_4N1N-	20	F,G,J	100, 200
0402NPO220_4N1N-	22	F,G,J	100, 200
0402NPO240_4N1N-	24	F,G,J	100, 200
0402NPO270_4N1N-	27	F,G,J	100, 200

100V = Space
200V = Commercial

PART NUMBER CODES AND DIMENSIONS

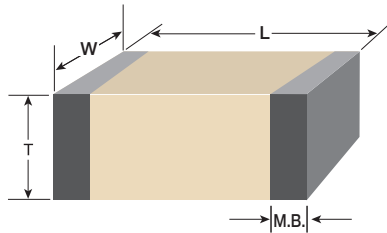

Capacitance Codes for Multilayer Capacitor

First Two Digits = Significant Figures of Capacitance in Picofarads

Third Digit = Additional Number of Zeros

- Examples:
- R05 = 0.05 pF
 - OR1 = 0.1 pF
 - 1R0 = 1 pF
 - 100 = 10 pF
 - 101 = 100 pF

Capacitance Tolerance Codes

Code	Tolerance	Cap Range
3	± 0.01 pF	≤ 2 pF
4	± 0.02 pF	≤ 2 pF
5	± 0.03 pF	≤ 3 pF
A	± 0.05 pF	< 10 pF
B	± 0.1 pF	< 10 pF
C	± 0.25 pF	< 10 pF
D	± 0.5 pF	< 10 pF
E	± 0.5%	≥ 10 pF
F	± 1%	≥ 10 pF
G	± 2%	≥ 10 pF
J	± 5%	≥ 10 pF
K	± 10%	≥ 10 pF
M	± 20%	≥ 10 pF

LENGTH (L) INCH (mm)	WIDTH (W) INCH (mm)	THICKNESS (T) INCH (mm)	METALIZATION BAND (M.B.) INCH (mm)
0.040 ± 0.004 (1.02 ± 0.10)	0.020 ± 0.004 (0.508 ± 0.10)	0.024 MAX (0.61) MAX	0.004 (0.102) min. band 0.015 (0.381) min. space

Termination Codes

Code	RoHS Comp.	Typical Application	Termination Build up	Recommended Reflow Temp.
N	No	Solder Reflow	90% Tin/10% Lead Plated Nickel Barrier Silver Base	220°C to 260°C Typical
T	Yes	Solder Reflow	100% Tin Plated Nickel Barrier Silver Base	220°C to 260°C Typical
P	Yes	Conductive Epoxy	Palladium-Silver Non-Magnetic	Cure Epoxy as per Manufacturer's Spec.

Other terminations available. Please contact factory.

Working Voltage

Code	WVDC
E	10
G	16
1	25
2	50
3	100
A	150
4	200

Packaging Codes

1 = Tape and Reel
5 = Waffle Pack

Marking available upon request (extra cost)

Code	Compliant
N	No
C	Yes

Digital S2P files available.









Presidio's NPO capacitors can be upscreened to SPACE LEVEL testing. Consult the factory for details. Some voltage derating may apply.

PART NUMBER EXAMPLE (How to Order)

0402	NPO	6R8	A	4	N	1	N	-
Size	Dielectric	Capacitance (6.8 pF)	Capacitance Tolerance (± .05 pF)	Voltage (200V)	Termination (Plated SnPb)	Packaging (Tape & Reel)	Not RoHS Compliant	Design-In Code (optional) (See Cat. 7100)



0402 NPO CERAMIC CAPACITORS FOR RF & MICROWAVE

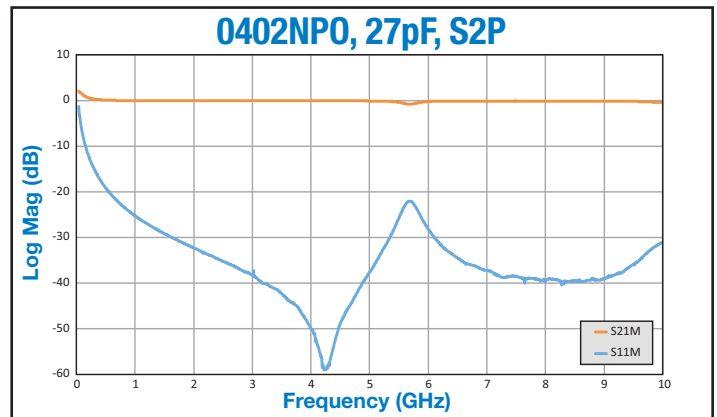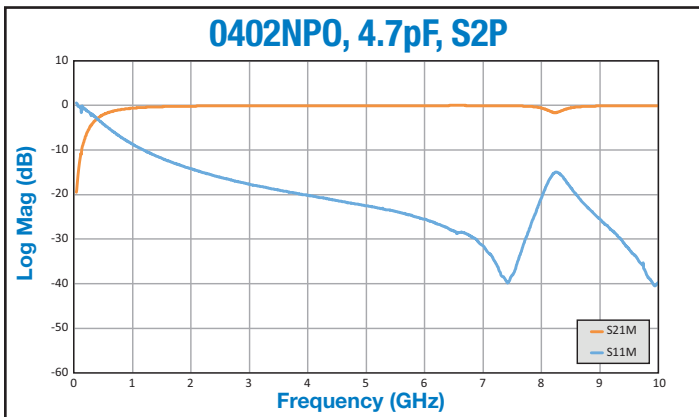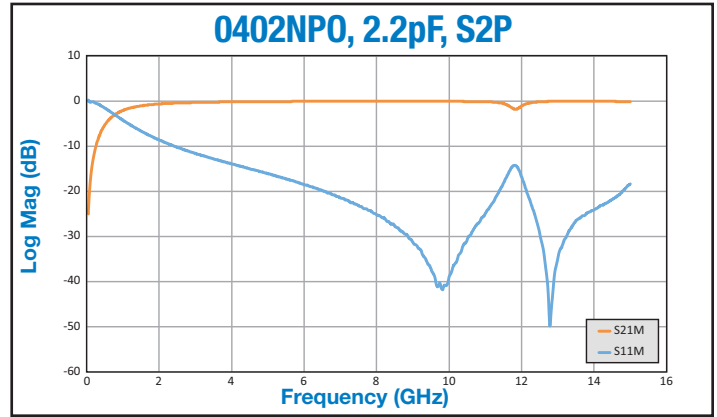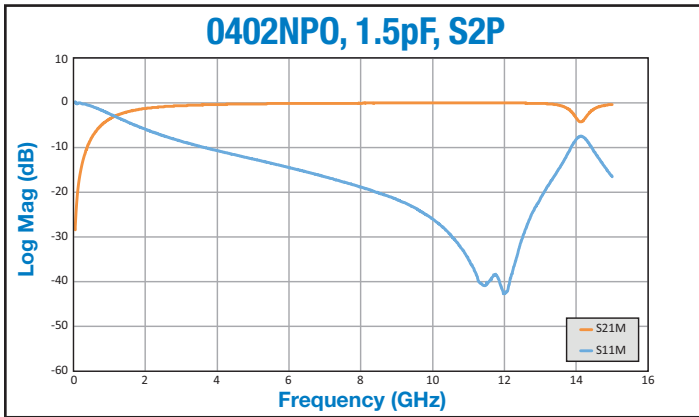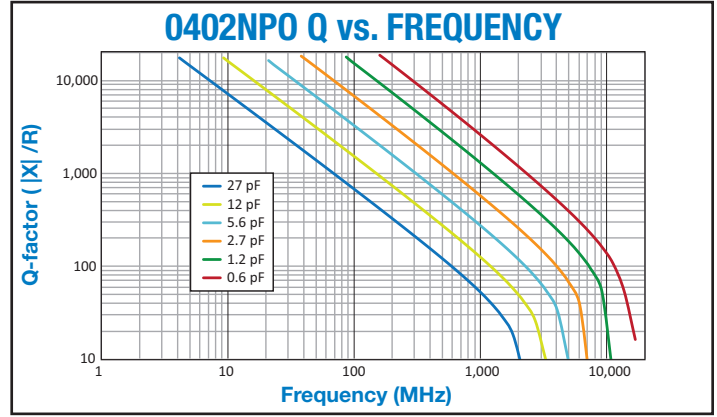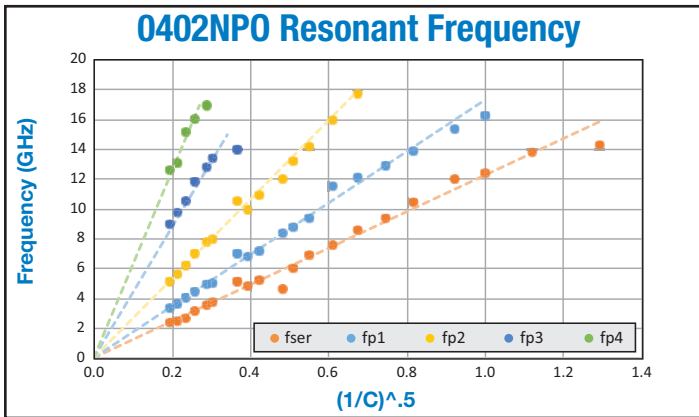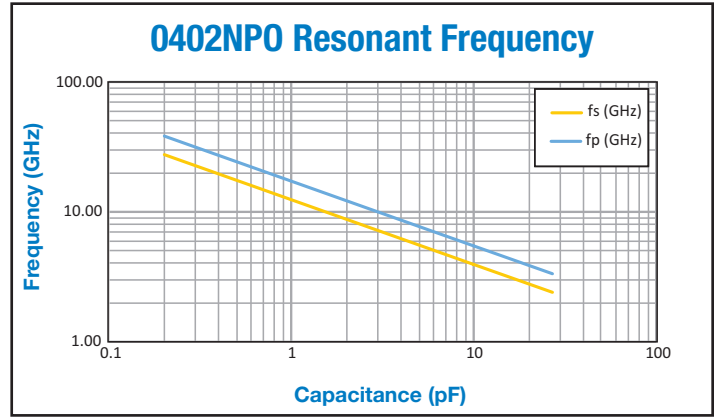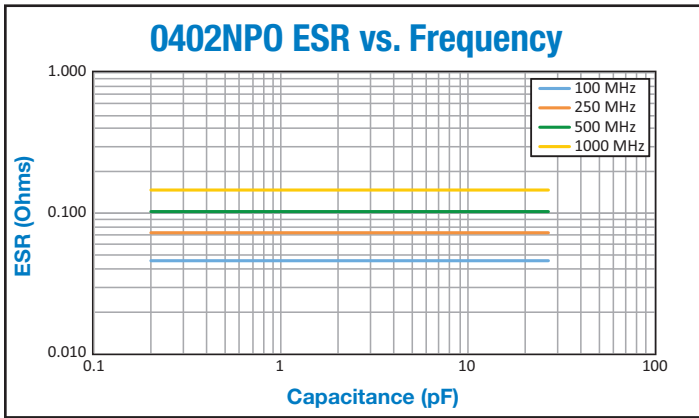

Call factory for digital copy of the 0402 NPO S2P files.



PRESIDIO COMPONENTS, INC.

MARCH 2021, REV. 2

7169 Construction Court, San Diego, CA 92121 USA • Tel: 858-578-9390 • Fax: 858-578-6225

www.presidiocomponents.com • info@presidiocomponents.com