



EUROPEAN SIZES

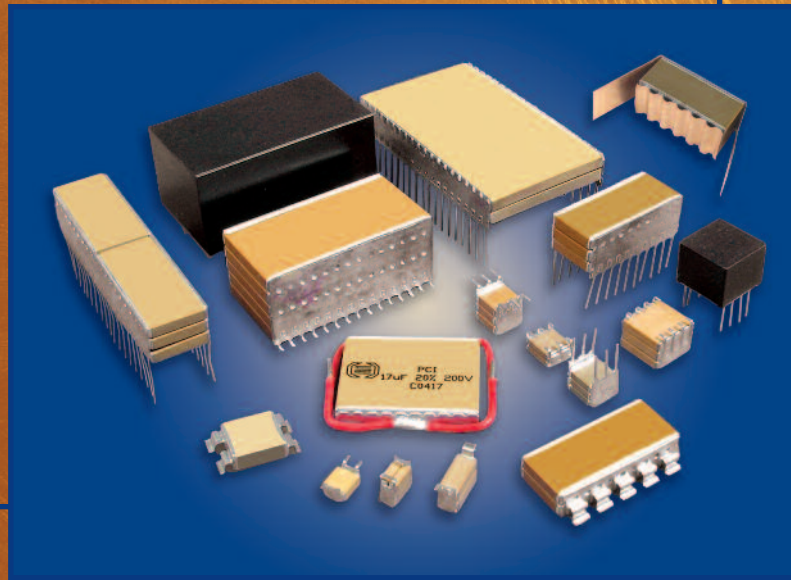

**CERAMIC STACKED CAPACITORS FOR
SWITCH MODE POWER SUPPLIES**

X7R AND NPO STACKED CAPACITORS

CAP DIMENSIONS

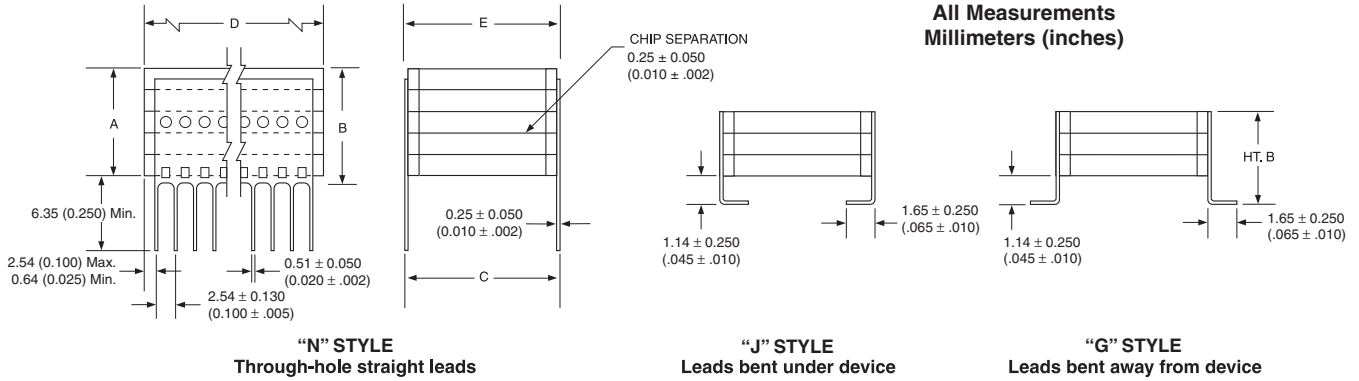

PERFORMANCE CHARACTERISTICS

- Capacitance:** Tested at 1kHz, 25°C, 1 VAC RMS.
- Dissipation Factor:** X7R < 2.5%, NPO < .15%, at 1kHz, 25°C, 1 VAC RMS.
- Insulation Resistance (25°C):** 100,000 MegΩ or 1000 MegΩ·μF, whichever is less.
- DWV:** Per MIL-PRF-49470 for 5 seconds, 50mA maximum charging current.
- Burn-in (optional):** Per MIL-PRF-49470.
- Voltage Temperature Coefficient:** From -55°C to +125°C.

- X7R:** ±15% maximum \varnothing without applied voltage
 50 V rated: +15 / -30% \varnothing typical at 25 VDC
 +15 / -60% \varnothing typical at 50 VDC
 100 V rated: +15 / -30% \varnothing typical at 50 VDC
 +15 / -60% \varnothing typical at 100 VDC

- BX:** ±15% maximum \varnothing at 0 VDC
 +15 / -25% maximum \varnothing at rated voltage

- BR:** ±15% maximum \varnothing at 0 VDC
 +15 / -40% maximum \varnothing at rated voltage


- BQ:** ±15% maximum \varnothing at 0 VDC
 +15 / -50% maximum \varnothing at rated voltage

- NPO:** ±30 ppm per °C max. \varnothing at rated voltage

ALSO AVAILABLE IN STACKED CAPACITORS

- Interdigitated stacked capacitors
- Voltage ratings optimized for your application
- BX, N2200, NPO, NPQ (High Q Porcelain)
- MIL-PRF-49470 style capacitors
- Encapsulated / Plastic Packages
- Vertical Stacks
- Optimized Lead Styles

Typical interdigitated stacked capacitor

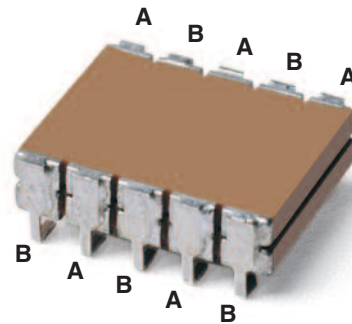

Interdigitated configuration results in reduced ESL

HOW TO ORDER

PH41	X7R	565	K	2	J	3
SIZE CODE	DIELECTRIC TYPE	CAPACITANCE (IN PICOFARADS)	TOLERANCE CODE	VOLTAGE CODE	LEAD STYLE	NO. OF LEADS
SIZE	NPQ* BR NPO BX X7R BQ	Two significant figures followed by the number of zeros. Example: 103 = 10,000 pF = .01μF	F = ± 1% ≥ 10pF G = ± 2% ≥ 10pF J = ± 5% ≥ 10pF K = ± 10% M = ± 20% Z = + 80% / -20% P = + 100% / -0%	2 = 50 V 3 = 100 V 4 = 200 V 6 = 500 V	J, G, N	Number of Leads Per Sde
			NPQ* NPO ONLY			
			ALL			

* Contact factory for NPQ dielectric



PRESIDIO COMPONENTS, INC.

7169 Construction Court, San Diego, CA 92121 USA • Tel: 858-578-9390 • Fax: 858-578-6225

www.presidiocomponents.com • info@presidiocomponents.com

X7R AND NPO STACKED CAPACITORS

TABLE 1 — MAXIMUM CAPACITANCE (µF)

PRESIDIO CASE SIZE

PH41NP0104K2N3
10µF, 10%, 50V, N Leads

PH32NP0223J6G3
.022µF, 5%, 500V, G Leads

	50V			100 V			200V			500V			"B" Height Max. mm (inches)
	X7R	BX	NPO	X7R	BX	NPO	X7R	BR	NPO	X7R	BQ	NPO	
PH31	2.7	1.8	.056	1.5	.62	.047	—	.33	.036	—	.15	.012	5.3 (.209)
PH32	5.2	3.3	.12	3.0	1.2	.082	—	.68	.082	—	.27	.022	8.9 (.351)
PH33	8.2	5.0	.18	4.7	2.0	.15	—	1.0	.12	—	.39	.039	12.6 (.496)
PH34	1.0	6.8	.22	5.6	2.7	.20	—	1.5	.15	—	.56	.047	16.3 (.642)
PH41	5.6	3.3	.10	2.7	1.2	.082	—	.56	.068	—	.22	.018	5.3 (.209)
PH42	10	6.8	.22	5.6	2.5	.18	—	1.2	.15	—	.47	.039	8.9 (.351)
PH43	16	10	.33	8.2	3.9	.27	—	1.8	.22	—	.68	.056	12.6 (.496)
PH44	20	12	.39	10	5.2	.33	—	2.2	.27	—	1.0	.068	16.3 (.642)
PH51	8.2	5.6	.18	3.9	1.8	.12	—	1.0	.10	—	.39	.027	5.3 (.209)
PH52	16	10	.39	8.2	3.9	.27	—	2.2	.22	—	.82	.056	8.9 (.351)
PH53	25	15	.56	12	6.0	.39	—	3.3	.33	—	1.2	.082	12.6 (.496)
PH54	33	22	.68	15	8.2	.47	—	3.9	.39	—	1.5	1.0	16.3 (.642)
PH61	15	10	.33	8.2	3.6	.22	—	2.2	.18	—	.82	.056	5.3 (.209)
PH62	30	22	.68	15	7.5	.47	—	4.7	.39	—	1.8	.12	8.9 (.351)
PH63	47	33	1.0	22	12	.68	—	6.8	.56	—	2.7	.18	12.6 (.496)
PH64	62	39	1.2	33	16	1.0	—	10	.68	—	3.3	.22	16.3 (.642)
PH71	30	18	.56	15	6.2	.47	—	3.3	.33	—	1.5	.10	5.3 (.209)
PH72	56	39	1.2	27	14	1.0	—	6.8	.68	—	3.3	.22	8.9 (.351)
PH73	90	56	1.8	39	20	1.5	—	10	1.0	—	4.7	.33	12.6 (.496)
PH74	110	68	2.2	47	27	1.8	—	12	1.2	—	5.6	.39	16.3 (.642)
PH76	30	18	.56	15	6.8	.47	—	3.3	.33	—	1.5	.10	5.3 (.209)
PH77	56	39	1.2	27	14	1.0	—	6.8	.68	—	3.3	.22	8.9 (.351)
PH78	90	56	1.8	39	22	1.5	—	10	1.0	—	4.7	.33	12.6 (.496)
PH79	120	68	2.2	47	30	1.8	—	12	1.2	—	5.6	.39	16.3 (.642)
PH81	33	22	.68	18	7.5	.56	—	3.9	.47	—	1.5	.15	5.3 (.209)
PH82	62	47	1.5	39	15	1.2	—	8.2	1.0	—	3.3	.33	8.9 (.351)
PH83	100	68	2.2	56	24	1.8	—	12	1.5	—	4.7	.47	12.6 (.496)
PH84	130	82	2.7	68	33	2.2	—	15	1.8	—	5.6	.56	16.3 (.642)
PH86	56	33	1.0	27	12	.82	—	6.8	.68	—	2.2	.22	5.3 (.209)
PH87	100	68	2.2	56	25	1.8	—	15	1.5	—	4.7	.47	8.9 (.351)
PH88	160	100	3.3	82	39	2.7	—	22	2.2	—	6.8	.68	12.6 (.496)
PH89	200	120	3.9	100	52	3.3	—	27	2.7	—	8.2	.82	16.3 (.642)
PH91	75	47	1.5	39	16	1.2	—	10	1.0	—	4.7	.33	5.3 (.209)
PH92	140	100	3.3	82	33	2.7	—	22	2.2	—	10	.68	8.9 (.351)
PH93	220	150	4.7	120	52	3.9	—	33	3.3	—	15	1.0	12.6 (.496)
PH94	270	180	5.6	150	72	4.7	—	39	3.9	—	18	1.2	16.3 (.642)

PH88BX396K3J14
39µ, 10%, 100V, J Leads

DIMENSIONS mm (inch)

	PH31-34	PH41-44	PH51-54	PH61-64	PH71-74	PH76-79	PH81-84	PH86-89	PH91-94
C (±.5mm)	6.4 (.252)	8.2 (.322)	10.2 (.400)	14.0 (.551)	15.2 (.600)	20.3* (.800)	10.2 (.400)	15.2 (.600)	20.3* (.800)
D (Max) Width	6.4 (.252)	8.7 (.342)	10.7 (.421)	13.6 (.535)	21.6 (.850)	16.6 (.653)	38.2 (1.503)	38.2 (1.503)	40.6 (1.598)
E (Max) Length	7.4 (.291)	9.2 (.362)	10.7 (.421)	14.9 (.586)	16.8 (.661)	21.6 (.850)	12.0 (.472)	18.9 (.744)	24.0 (.944)
Leads per Side	3	3	4	5	7	6	14	14	14
Chip Size	2424	3033	3740	5550	5783	7763	37148	57148	77148

Notes:

1. "B" height dimensions in Table 1 are based on commonly ordered parts. Optimized heights are available.
2. * Tolerance is ± .8mm (.032").
3. The above case sizes are the most commonly used. Other case sizes are available, consult factory or website.
4. Vertical stacks are available, consult factory.
5. Other voltages available; consult factory.
6. Consult factory for NPQ dielectric.



PRESIDIO COMPONENTS, INC.

7169 Construction Court, San Diego, CA 92121 USA • Tel: 858-578-9390 • Fax: 858-578-6225

www.presidiocomponents.com • info@presidiocomponents.com

X7R AND NPO STACKED CAPACITORS

TABLE 2 — MAXIMUM CAPACITANCE (μF)

PR41BX106K2N3
10μF, 10%, 50V, N Leads

PR32NP0223J6G3
.025μF, 5%, 500V, G Leads

PRESIDIO CASE SIZE

	50V			100 V			200V			500V			"B" Height Max. mm (inches)
	X7R	BX	NPO	X7R	BX	NPO	X7R	BR	NPO	X7R	BQ	NPO	
PR21	2.2	1.2	.056	2.2	.47	.33	.47	.27	.027	.18	.12	.010	4.6 (.181)
PR22	4.7	2.5	.10	4.7	1.0	.68	1.0	.52	.050	.33	.22	.018	7.5 (.295)
PR31	2.7	1.5	.068	1.8	.82	.047	.68	.39	.039	.25	.15	.012	5.08 (.200)
PR32	5.6	3.0	.12	3.9	1.5	.10	1.2	.82	.080	.47	.3	.025	8.13 (.320)
PR41	4.7	2.7	.10	3.3	1.2	.082	1.2	.68	.068	.39	.25	.022	4.9 (.192)
PR42	10	5.6	.22	6.8	2.5	.15	2.2	1.2	.12	.82	.5	.047	8.2 (.323)
PR51	6.8	4.2	.15	4.7	2.2	.12	1.8	1.0	.10	.56	.39	.033	4.9 (.192)
PR52	12	8.2	.33	10	4.5	.25	3.6	2.2	.20	1.2	.82	.068	8.2 (.323)
PR61	15	7.5	.33	10	3.9	.25	3.3	2.2	.20	1.2	.82	.068	4.9 (.192)
PR62	30	15	.68	20	8.2	.47	6.8	3.9	.39	2.5	1.5	.12	8.2 (.323)

DIMENSIONS mm (inch)

	PR21-22	PR31-32	PR41-42	PR51-52	PR61-62
C (±.5mm)	6.4 (.252)	6.4 (.252)	8.2 (.322)	10.2 (.400)	14.0 (.551)
D (Max) Width	5.4 (0.213)	6.9 (.27)	8.7 (.342)	10.7 (.421)	13.6 (.535)
E (Max) Length	7.6 (.300)	7.6 (.3)	9.2 (.362)	10.7 (.421)	14.9 (.586)
Leads per Side	2	3	3	4	5
Chip Size	2620	2626	3233	3740	5451

Notes:

1. "B" height dimensions in Table 2 are based on commonly ordered parts. Optimized heights are available.
2. The above case sizes are the most commonly used. Other case sizes are available, consult factory or website.
3. Vertical stacks are available, consult factory.
4. Other voltages available; consult factory.
5. Consult factory for NPQ dielectric.




PRESIDIO COMPONENTS, INC.


7169 Construction Court, San Diego, CA 92121 USA • Tel: 858-578-9390 • Fax: 858-578-6225

www.presidiocomponents.com • info@presidiocomponents.com

PRESIDIO PRODUCT LINES

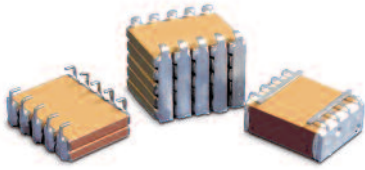


INTERDIGITATED LEADS

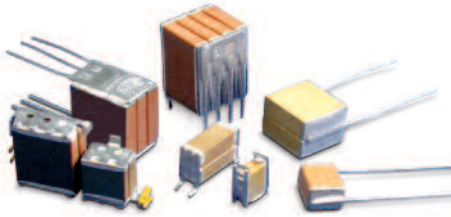


OPTIMIZED STACKED ASSEMBLY




HIGH FREQUENCY HIGH POWER




HIGH Q NPO RF CAPACITORS



HIGH Q & BROADBAND SINGLE LAYER



BROADBAND DC BLOCK BB SERIES



BYPASS & BROADBAND VL/VB SERIES

PRESIDIO COMPONENTS, INC. maintains more than 100 million commercial and military parts in inventory. We also offer multitudes of intermediate sizes, voltages, tolerances, termination finishes, lead-frame styles and more.


Some of our specialties include ceramic capacitors for high temperatures, cryogenic temperatures, pulse discharge applications as well as high Q dielectric, negative and positive temperature characteristic and piezoelectric ceramic formulations.

Backed with numerous patents and hundred of years of combined experience, Presidio is well suited to offer a solution to your demanding applications. Please contact our engineering team to discuss your specific needs.

100% U.S. Made, 100% U.S. Owned




'S' LEADS

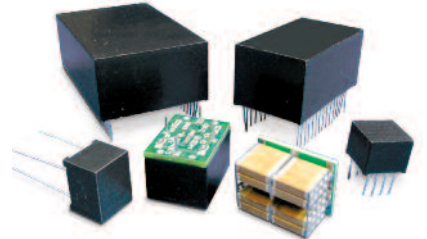

ENCAPSULATED

MAIN PRODUCT CATALOGS


Click Catalog Cover to Visit Product Page on Website




SURFACE MOUNT CERAMIC CHIP CAPACITORS




HIGH RELIABILITY EXTENDED RANGE CHIPS FOR SPACE




CERAMIC STACKED CAPACITORS FOR SMPS




HIGH TEMPERATURE CERAMIC CAPACITORS



HIGH VOLTAGE RADIAL LEADED & MIL-PRF-49467 CERAMIC CAPACITORS



CERAMIC CAPACITORS FOR RF ENGINEERS



HIGH Q NPO CERAMIC CAPACITORS FOR RF & MICROWAVE



PULSE DISCHARGE CERAMIC CAPACITORS



PRESIDIO COMPONENTS, INC.

7169 Construction Court, San Diego, CA 92121 USA • Tel: 858-578-9390 • Fax: 858-578-6225

www.presidiocomponents.com • info@presidiocomponents.com

REV. D
MARCH 2015



7169 Construction Court, San Diego, CA 92121 USA • Tel: 858-578-9390 • Fax: 858-578-6225
www.presidiocomponents.com • info@presidiocomponents.com